



PCT/EP03/10465



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 21 JAN 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

Dated 9 December 2003


BEST AVAILABLE COPY

6. JUN. 2003 15:58

HARRISON GODDARD FOOT

PCT/EP03/1.0465

Patents Form 1/77

Patents Act 1977
(Rule 16)The
Patent
Office06JUN03 E813096-1 D02973
P01/T700 0.00-0313057.2**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)*

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

RH/P101076GB1

2. Patent application number

(The Patent Office will fill in this part)

0313057.2

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*Basic Holdings
41 Allesbury Road
Ballsbridge
Dublin 4
Republic of IrelandPatents ADP number *(if you know it)*

7531650003

If the applicant is a corporate body, give the country/state of its incorporation

Republic of Ireland

4. Title of the invention

Apparatus for Simulating Flames

5. Name of your agent *(if you have one)*

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent *(including the postcode)*Belgrave Hall
Belgrave Street
Leeds
LS2 8DDPatents ADP number *(if you know it)*

14571001

7631310002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number
*(if you know it)*Date of filing
(day / month / year)

GB

0221728.9

19 September
2002

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*a) *any applicant named in part 3 is not an inventor, or*b) *there is an inventor who is not named as an applicant, or*c) *any named applicant is a corporate body.*

See note (d))

Yes

Patents Form 1/77

0071041 06 JUN 03 04:07

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	10
Claim(s)	3
Abstract	1
Drawing(s)	5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Rosie Hardy

6 June 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Rosie Hardy

0113 233 0100

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

Apparatus for Simulating Flames

The present invention relates to apparatus for simulating flames, such as are used in flame effect electric heating appliances (i.e. electric fires). Flame simulating apparatus in general are well known and have been described in, for example, GB 2 230 335 and GB 2 275 105. Prior art apparatus such as described in the above patents is intended for use in an electric fire located in a conventional fireplace. As such, the fire is designed so that a major part of the fire fits into the recess of the fireplace. Therefore, the overall depth of the fire (i.e. its front-to-back dimension) can be relatively great.

The present invention seeks to provide an apparatus which has an equivalent or superior flame simulating effect, primarily for use in an electric fire, but which is suitable for mounting directly on a wall, that is, without the need for any sort of recess in the wall to accommodate the apparatus. In order to achieve such an apparatus which is commercially and practically acceptable, the apparatus of the present invention is constructed to have a depth which is considerably less than conventional apparatus.

According to a first aspect of the invention there is provided a flame simulating apparatus comprising

- i) a light source;
- i) reflecting means for reflecting light from the light source;
- ii) means for producing moving beams of light; and
- iii) a viewing screen capable of diffusing and transmitting light, wherein the light source is disposed below the reflecting means and behind the screen, the means for producing moving beams of light is disposed in front of the light source and below the screen and light from the light source is reflected by the means for producing moving beams of light onto the reflecting means and is reflected by the reflecting means onto the screen to produce a perceptible image viewable on the

screen, and wherein the light source comprises at least one halogen bulb or at least one tungsten filament bulb having a lateral dimension of not more than 40mm.

According to a second aspect of the invention, there is provided a flame effect

5 electric fire comprising:

- i) a housing adapted to be mounted on a substantially plane wall;
- ii) heating means disposed in the housing operative to draw air into the housing, heat the air and expel the heated air; and
- 10 iii) a flame simulating assembly mounted in the housing and comprising:

(a) a light source;

(b) reflecting means for reflecting light from the light source;

(c) means for producing moving beams of light; and

(d) a viewing screen capable of diffusing and transmitting light, wherein
the light source is disposed below the reflecting means and behind the screen,
15 the means for producing moving beams of light is disposed in front of the
light source and below the screen and light from the light source is reflected
by the means for producing moving beams of light onto the reflecting means
and is reflected by the reflecting means onto the screen to produce a
perceptible image viewable on the screen, and wherein
20 the heating means draws in and expels air through a downwardly facing
external panel of the housing.

Preferably in this aspect of the invention the light source comprises at least one
halogen bulb or at least one tungsten filament bulb having a lateral dimension of not
25 more than about 40mm.

Preferably a rear reflector is provided behind the light source.

Most preferably in the first and second aspects of the invention where the light source
30 is a halogen bulb it has a width of not more than about 20mm, typically not more
than about 15mm, for example in the range of 13 to 15mm.

In a particularly preferred embodiment of both aspects of the invention, the means for producing moving beams of light comprises a shaft mounted substantially horizontally for rotation about its axis, said shaft having a plurality of generally radially directed pieces of reflective material depending therefrom, said pieces being effective to reflect light from the light source onto the screen. Thus light from the light source striking the pieces of reflective material is reflected by those pieces. Because the pieces of reflective material are rotating about the shaft, the light is reflected at constantly changing angles (since effectively the angle of incidence of the light on the pieces of reflective material is constantly changing). This causes light reflected from the pieces of reflective material, after further reflection by the reflecting means to trace a path up the screen, giving the appearance of moving flames. The pieces of reflective material are preferably non-planar to further vary the angle of reflection of the light and to contribute to a random appearance of the flame-like image on the screen.

In a further embodiment of both aspects of the invention, the shaft is driveably connected at its first end to a motor for rotation of the shaft and is retained at its second end in a supporting bracket, the shaft being displaceable from its operative position thereby to permit access to the light source. In this way, a facility is provided for a user to change the light bulbs forming the light source if the bulbs fail.

Preferably in this embodiment the shaft is connected to the motor via a flexible bush and the second end of the shaft is releasably mounted in the bracket, the shaft being displaceable when desired by flexure of the flexible bush. Thus, in order to change a bulb of the light source, a user simply needs to release the second end of the shaft from its mounting and draw the second end of the shaft forwards causing the bush at the first end to bend. Access to the bulb or bulbs is then possible and when the bulb has been changed, the second end of the shaft can be re-mounted in its bracket.

In a further preferred embodiment of each aspect of the invention the reflecting means comprises a sheet of material having reflecting regions and non-reflecting regions. The reflecting regions may be generally flame shaped. The reflecting and non-reflecting regions may be formed by any suitable means such as treating a sheet of reflective material to make regions thereof matte, or attaching shaped pieces of reflective material to a dull or matte backing substrate.

The reflecting surface of the reflecting means may be bowed, for example part cylindrical.

10

In preferred arrangements of each aspect of the invention, a simulated fuel bed is disposed directly in front of the diffusing and transmitting screen. Preferably the screen comprises a reflective front surface whereby a reflection of the fuel bed can be seen in the screen. In this way, the simulated flames (i.e. the image) in the screen appear behind the simulated fuel bed and in front of its reflection, so that the flames appear to emanate from the middle of a combined fuel bed comprising the simulated fuel bed and its reflection.

15

For a better understanding of the invention and to show how the same may be carried into effect, reference will be made by way of example only to the following drawings in which:

20

Figure 1 is a front plan view of a partly disassembled fire according to the invention;

25

Figure 2 is a section along the line A1-A1 of Figure 1, but showing the complete fire;

Figure 3 is a plan view of one arrangement of the base of the housing of an assembled fire according to the invention;

30

Figure 4 is a top plan view of an assembled fire;

Figure 5 is a schematic view of a reflecting means employed in the invention;

Figure 6 illustrates in greater detail the means for producing moving beams of light;

- 5 Figure 7 shows a detail of the mounting of one end of the means for producing moving beams of light; and

Figure 8 shows the means for producing moving beams of light in its displaced position.

10

- Referring now to the drawings the fire comprises a housing 10 preferably of metal having a front frame 12. The housing retains a protective screen 14 of a suitable optically transparent material, preferably a glass or possibly plastic material through which the flame simulating arrangement of the fire can be viewed. The screen 14 has
15 been removed in the view shown in Figure 1. The protective screen does not form part of the flame simulating arrangement and serves primarily to enclose the flame simulating components to prevent the ingress of dust, for example.

- The flame simulating arrangement of the illustrated fire comprises a light source 16,
20 means 18 for modifying the light from the light source 16 to provide the appearance of movement, a reflecting means 20, and a viewing screen 22. The fire of the invention preferably further comprises a simulated fuel bed 24 (not shown in Figure 1) which may be formed from a plastic material moulded in to a suitable shape and suitably coloured to represent pieces of solid fuel (such as coal or logs) resting on an
25 ember bed. The fuel bed 24 is illuminated from below by the light source 16. Preferably the light from the light source 16 is modified by the means 18 so that the intensity of the light falling on different parts of the fuel bed 24 varies in an apparently random manner, simulating the changing intensity of light from glowing embers.

30

The means 18 for modifying the light from the light source 16 preferably comprises a shaft 26 which is mounted essentially horizontally in use. The shafted is rotated about its axis by a motor 28. Depending from the shaft 26 is a plurality of pieces of reflective material 30. These pieces 30 may be of metal, metal foil, metallised plastic or the like and are arranged to extend generally radially from the shaft 26. The pieces 30 need not lie exactly radially and considerable variance from an exact radial alignment is acceptable. The individual pieces 30 may be planar or may be twisted. Light from the light source 16 strikes the pieces 30 as they rotate about the shaft 26 and is reflected by the pieces 30 towards the reflecting means 20 and towards the underside of the fuel bed 24. The rotation of the pieces 30 about the shaft 26 causes the light from the light source 16 to be reflected at constantly changing angles with respect to a vertical plane (i.e. up and down the reflecting means 20) and if the pieces 30 are twisted this effect is enhanced by reflection at constantly changing angles in the horizontal plane (i.e. across the reflecting means from side to side). The result is an apparently random movement of the light. The means 18 for modifying light from the light source may have alternative constructions provided that an equivalent effect is achieved. For example, the means 18 may comprise pieces of reflective material such as pieces of glass or mirror tiles apparently randomly mounted on the outer surface of a rotatable cylinder so that light striking the glass or mirror pieces is reflected in an apparently random manner. Any of the reflecting components of the means 18 may be coloured in appropriate colours such as reds, greens, oranges and blues to enhance the appearance of the image in the viewing screen 22.

From the reflecting means 20, the light is reflected onto the viewing screen 22 to form a perceptible image. The viewing screen 22 has been removed in the view shown in Figure 1. The reflecting means 20 may be an essentially planar sheet of material, or the sheet of material may be curved or uneven in shape. The whole surface of the sheet may be reflective, or only part thereof may be reflective. In a preferred arrangement, the reflecting means 20 comprises a sheet of material having reflective areas which are approximately flame shaped with the remainder of the sheet being essentially matte. The reflective areas may be formed from one or more

cut-outs 20a of metal or other reflective material having the approximate shape of flames applied to an essentially matte front surface 20b of the sheet. The surface 20b may, for example be matte black. Alternatively, an essentially reflective sheet may have regions which are made matte by etching, painting or the like. Providing
5 reflective areas in flame shape enhances the flame-like appearance of the image in the viewing screen 22. Other arrangements of the reflecting means are possible, provided that they do not lead to an increased depth of the overall fire. For example, the reflective means may comprise a reflective back sheet which reflects light from the light source 16 through a further sheet disposed in front of the back sheet, the
10 further sheet having flame shaped apertures through which light passes after reflection by the back sheet.

The viewing screen 22 is preferably a planar glass screen but may be curved or may be formed from suitably optically transmissive plastics material. The viewing screen
15 22 is constructed to be partially diffusing of light and partially transmitting. Such screens are described in, for example GB 2 275 105. The partially diffusing nature of the screen enhances the flame like nature of the image which is viewable in the screen 22. In preferred arrangements, the front surface of the screen (as seen by a user) is made partially reflective so that the fuel bed 24 is reflected in the screen. In
20 this way the image of the flames appears to emanate from the middle of a combined fuel bed comprising the fuel bed 24 and its reflection in the screen 22. Preferably the screen 22 is darkly tinted or "smoked" so that the internal components of the fire are not visible when the fire is not in use.

25 The choice of light source is an important feature of the flame simulating assembly of the present invention. Convention flame effect fires for mounting in a hearth or fireplace have used conventional incandescent light bulbs which have an approximate diameter of around 35mm. In conventional fires, there is no practical restriction on the depth of the fire and so the size of the light source is not a problem. For
30 mounting the fire directly on an essentially plane wall surface, the fire must be made slimmer (i.e. of a reduced depth) so that it does not penetrate too far into the room.

Accordingly the fire of the present invention uses, in one embodiment halogen bulbs which have a much smaller diameter of about 13-15mm. Alternatively, the light source 16 may comprise one or more so-called "candle" bulbs which are usually tungsten filament bulbs having a narrower lateral dimension than conventional tungsten filament bulbs, typically not more than 40mm, preferably not more than about 35mm. The smaller size of these bulbs enables them to be mounted behind the means 18 for producing moving beams of light and achieves a significant space saving. Typically, two halogen bulbs or candle bulbs are used as the light source. In this specification, "halogen bulb" refers to halogen bulbs as such and to other bulbs of equivalent size, power and brightness or intensity. Halogen bulbs thus achieve an intensity of emitted light which is comparable to, or better than, a conventional incandescent bulb, but with a much reduced size. A typical halogen bulb suitable for use in the present invention has a power of 40W to 60W. An example is a bulb sold under the trade name "HALOPIN" by Osram. Halogen bulbs because of their brightness and intensity, together with the relative dispositions of the bulbs, the reflection means 20 and the means 18 have the added, and significant, unexpected benefit of achieving an improved flame effect as viewed in the screen 22. In particular, this arrangement provides an increased height of the flames which is especially beneficial when the simulated fuel is wooden logs.

20

In order to maximise the amount of light transmitted from the light source 16 to the fuel bed 24 and the viewing screen 22 (via the means 18) a rear reflector 21 may be mounted behind the light source. The rear reflector 21 is preferably plane but may possibly be non-planar, such as parabolic. The rear reflector may comprise a sheet of polished metal, a metallised plastic sheet or a mirror, for example. Provision of the rear reflector avoids the need for extra bulbs to achieve a given illumination, so avoiding adding to the dimension and complexity of the apparatus. The rear reflector 21 may also allow the use of candle bulbs where otherwise a halogen bulb would be required, since the reflector is effecting in maximising the amount of light from the light source which is transmitted to the means 18 for producing moving beams of light, the fuel bed 24 etc.

30

A consequence of mounting the light source 16 behind the light modifying means 18 is that the means 18 obstructs access to the light source 16 for changing the halogen bulbs when, at the end of their life, they fail. The present invention overcomes this
5 problem by making the means 18 displaceable so that access can be gained to the light source.

As can be seen in particular in Figures 6, 7 and 8, the shaft 26 of the means 18 is connected at a first end to a motor 28 so that drive is transferred from the motor 28 to
10 the shaft 26 to rotate the shaft 26. The shaft 26 is connected to the motor 28 by means of a bush 32. The bush 32 is made from a rubber or other similarly flexible material. The other end of the shaft 26 is mounted in a bracket 34. A further bush 36 may be provided. The bracket 34 includes a slot 38 through which the shaft 26 can be withdrawn to displace the means 18 from its use position. The slot 38 may be
15 configured to retain the shaft 26 (via bush 36) with a latching action. For example the leading part of the slot may be made slightly narrower than the width of the bush 36 so that the bush 36 and/or the bracket 34 must be slightly deformed to remove or insert the shaft 26 in the slot 38. On releasing the shaft 26 from the bracket 34, the bush 32 is deformed to accommodate the movement of the shaft 26, as can be seen in
20 Figure 8. The bush 32 allows the shaft to be moved until it is approximately perpendicular to its use position so that virtually unobstructed access can be gained to the light source 16.

A further important feature of the fires according to the invention is the disposition of
25 the heater. Conventional fires have mounted a fan heater in the fire housing, sometimes at the base so that the outlet for air heated by the fan heater, and the fan heater itself, are arranged essentially horizontally and sometimes at the top of the housing so that the outlet for air heated by the fan heater, and the fan heater itself, are arranged essentially horizontally or at most at about 45° to the horizontal. This
30 arrangement is satisfactory where space is not restricted since a significant part of the depth of the fire is inset into the recess of the fireplace. However this arrangement is

not satisfactory for a wall mounted fire as in the present invention since a fire of the depth required to accommodate a conventionally mounted heater would be obstructive and unattractive in use. Accordingly the inventors of the present invention have sought an alternative solution and have appreciated that because a

5 wall mounted fire is not required to stand on a floor (such as a hearth), air can be drawn into and expelled from the housing of the fire through the base of the fire. The free space between the base of the fire and the floor when the fire is mounted on a wall provides adequate room for air circulation to provide effective and safe heating of a room. This arrangement allows the fan heater to be turned through about 90°

10 compared with the position in a conventional fire so that the depth (front-to back dimension) occupied by the fan heater is considerably reduced and consequently providing a fire of considerably reduced depth. This arrangement can be seen especially in Figures 2 and 3 in which a fan or blower 40 draws air in through an aperture 42 formed in the base of the housing 10, heats the air and expels the heated

15 air through a second aperture 44 formed in the base of the housing 10. Preferably the front of the fan heater arrangement is protected by a suitable permanently fixed grill or safety guard 46 to prevent access to the fan heater arrangement while the shaft 26 is being displaced to gain access to light source 16.

20 By means of the present invention a slim wall mountable fire is provided which provides a flame effect equivalent to, or better than a conventional fire while also providing effective heating by means of the fan heater arrangement. A conventional flame effect fire has a depth of the order of 300mm or more. By the arrangements described above the present invention can provide a fire having a depth of 200mm or

25 less, preferably 180mm or less.

Claims

1. A flame simulating apparatus comprising
- 5 i) a light source;
- ii) reflecting means for reflecting light from the light source;
- iii) means for producing moving beams of light; and
- iv) a viewing screen capable of diffusing and transmitting light, wherein
- 10 the light source is disposed below the reflecting means and behind the screen,
- the means for producing moving beams of light is disposed in front of the
- light source and below the screen and light from the light source is reflected
- by the means for producing moving beams of light onto the reflecting means
- and is reflected by the reflecting means onto the screen to produce a
- perceptible image viewable on the screen, and wherein the light source
- 15 comprises at least one halogen bulb or tungsten filament bulb having a
- maximum lateral dimension of not more than about 40mm..
2. A flame effect electric fire comprising:
- i) a housing adapted to be mounted on a substantially plane wall;
- 20 ii) heating means disposed in the housing operative to draw air into the
- housing, heat the air and expel the heated air; and
- iii) a flame simulating assembly mounted in the housing and comprising:
- (a) a light source;
- (b) reflecting means for reflecting light from the light source;
- 25 (c) means for producing moving beams of light; and
- (d) a viewing screen capable of diffusing and transmitting light, wherein
- the light source is disposed below the reflecting means and behind the screen,
- the means for producing moving beams of light is disposed in front of the
- light source and below the screen and light from the light source is reflected
- 30 by the means for producing moving beams of light onto the reflecting means

and is reflected by the reflecting means onto the screen to produce a perceptible image viewable on the screen, and wherein the heating means draws in and expels air through a downwardly facing external panel of the housing.

5

3. A flame effect electric fire as claimed in claim 2 wherein the light source comprises at least one halogen bulb or tungsten filament bulb having a maximum external dimension of not more than about 40mm..

- 10 4. A flame simulating apparatus as claimed in claim 1 or a flame effect fire as claimed in claim 3 wherein the light source has a width of not more than about 20mm to 35mm.

- 15 5. A flame simulating apparatus or a flame effect fire as claimed in claim 4 wherein the light source has a width of not more than about 15mm.

- 20 6. A flame simulating apparatus as claimed in claim 1, 4 or 5 or a flame effect fire as claimed in any of claims 2 to 5 wherein the means for producing moving beams of light comprises a shaft mounted substantially horizontally for rotation about its axis, said shaft having a plurality of generally radially directed pieces of reflective material depending therefrom, said pieces being effective to reflect light from the light source onto the screen.

- 25 7. A flame simulating apparatus or a flame effect fire as claimed in claim 6 wherein the shaft is driveably connected at its first end to a motor for rotation of the shaft and is retained at its second end in a supporting bracket, the shaft being displaceable from its operative position thereby to permit access to the light source.

- 30 8. A flame simulating apparatus or a flame effect fire as claimed in claim 7 wherein the shaft is connected to the motor via a flexible bush and the second

end of the shaft is releaseably mounted in the bracket, the shaft being displaceable when desired by flexure of the flexible bush.

- 5 9. A flame simulating apparatus as claimed in claim 1, or 4 to 8 or a flame effect fire as claimed in any of claims 2 to 8 wherein the reflecting means comprises a sheet of material having reflecting regions and non-reflecting regions.
- 10 10. A flame simulating apparatus or a flame effect fire as claimed in claim 9 wherein the reflecting regions are generally flame shaped.
- 11 11. A flame simulating apparatus as claimed in claim 1, or 4 to 10 or a flame effect fire as claimed in any of claims 2 to 10 wherein the reflecting surface of the reflecting means is concave.
- 15 12. A flame simulating apparatus as claimed in claim 1, or 4 to 11 or a flame effect fire as claimed in any of claims 2 to 11 further comprising a simulated fuel bed disposed directly in front of the diffusing and transmitting screen.
- 20 13. A flame simulating apparatus or a flame effect fire as claimed in claim 12 wherein the screen comprises a reflective front surface whereby a reflection of the fuel bed can be seen in the screen.

Abstract**Apparatus for Simulating Flames**

- 5 Apparatus for simulating flames and such apparatus used in a wall-mounted flame effect electric fire are described. The apparatus arranges a light source below a reflecting means and a means for modifying light from the light source in front of the light source and below a partially diffusing and partially transmitting viewing screen. The light source comprises at least one halogen bulb or other lamp of comparable
- 10 power, brightness size and intensity. The fire incorporating the flame simulating apparatus arranges a fan heater to draw air in through, and to expel heated air through, the base of the fire. The arrangement reduces the depth of the fire to facilitate wall mounting.

115


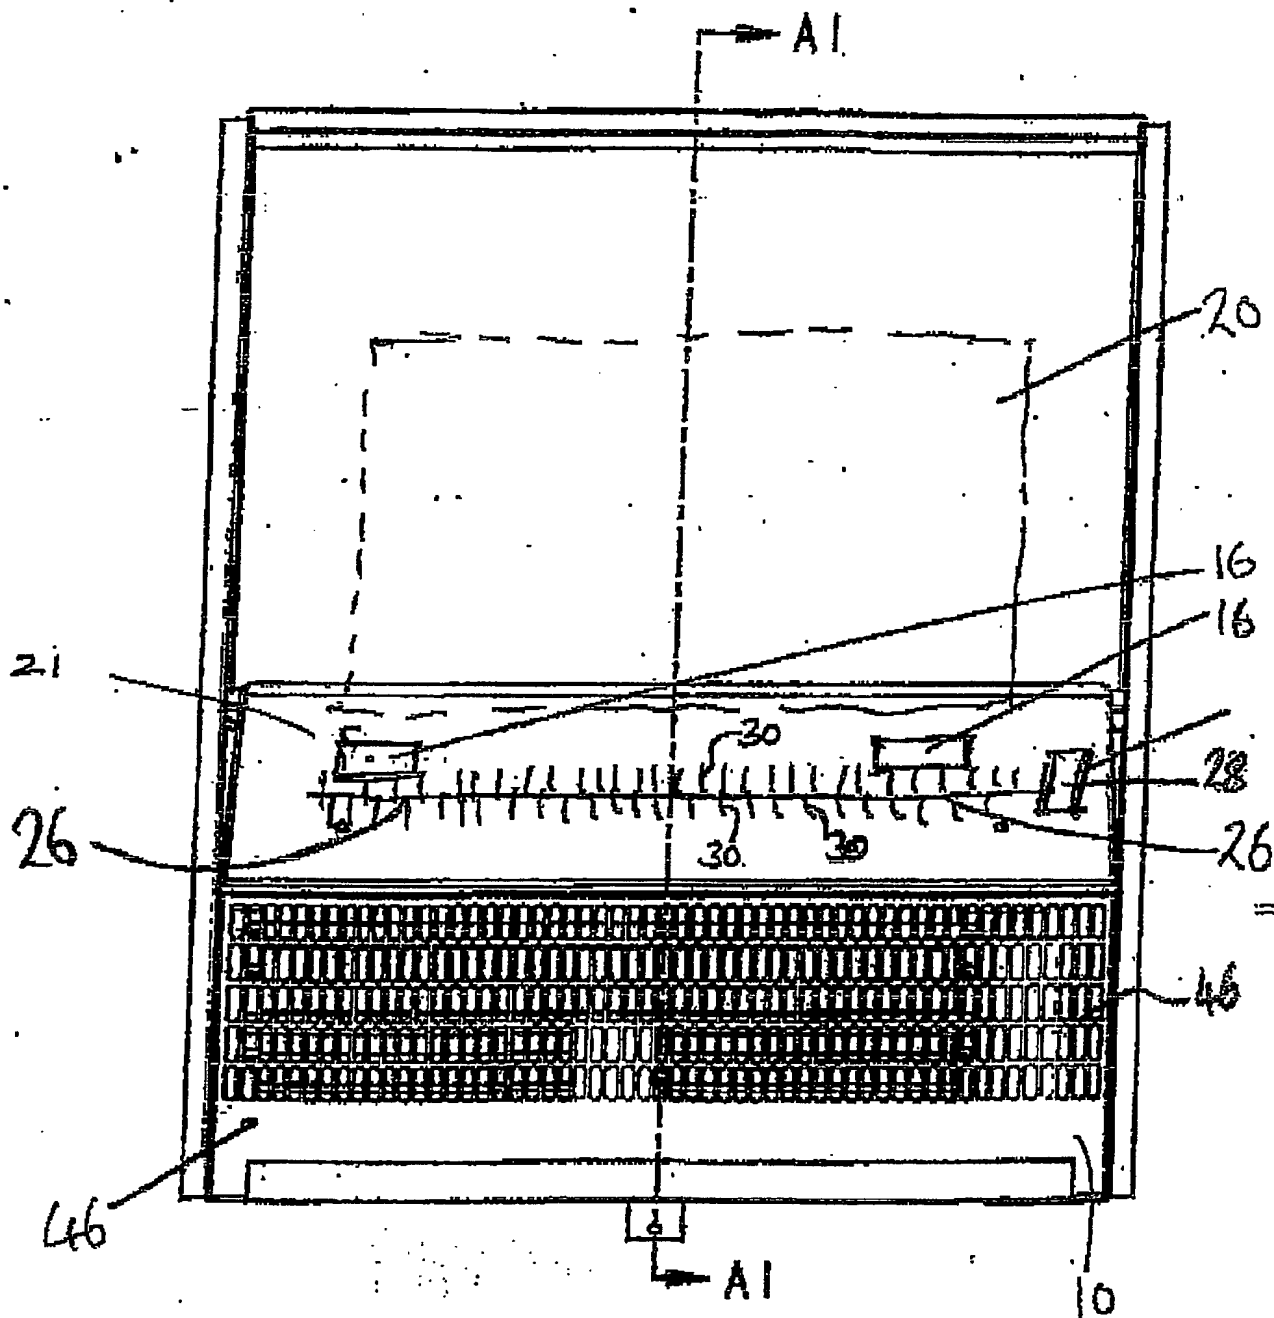


Figure 1

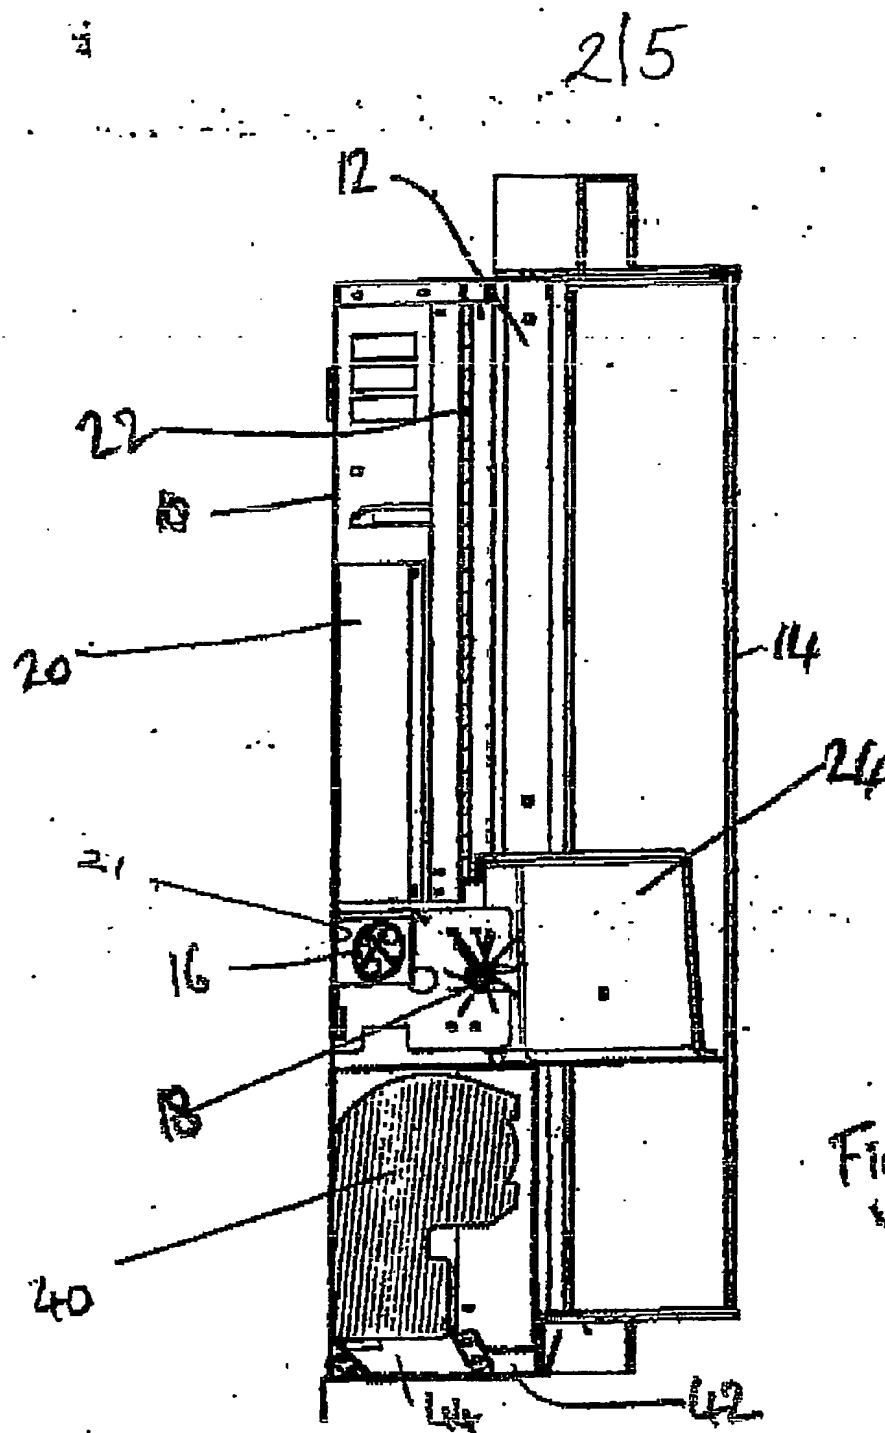

3/5

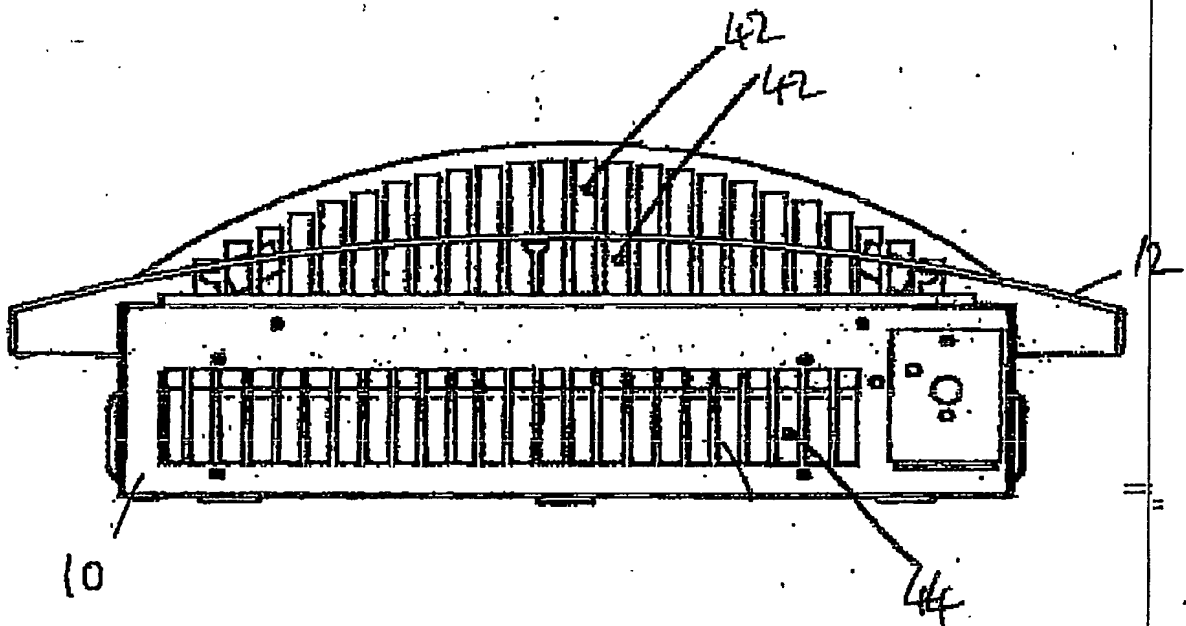


Figure 3

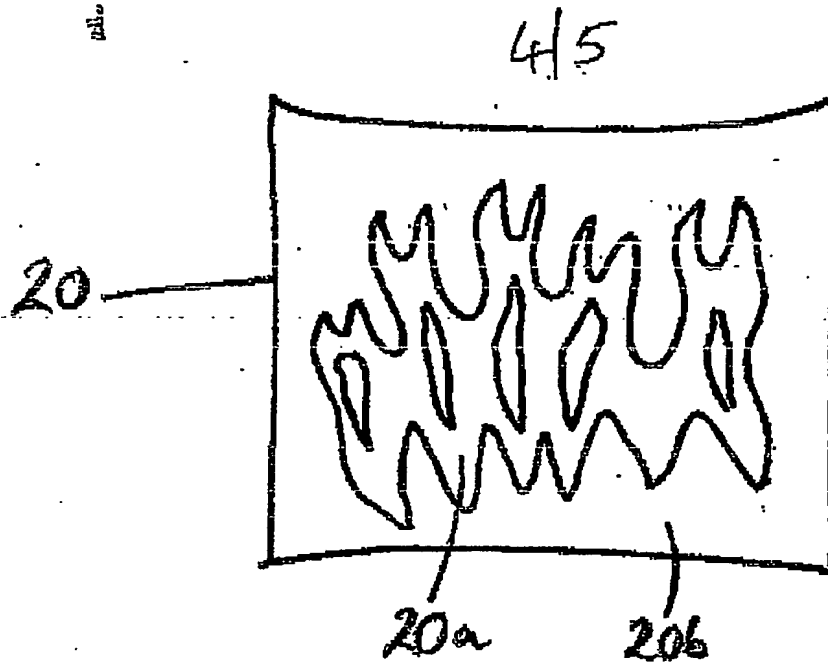


Figure 5

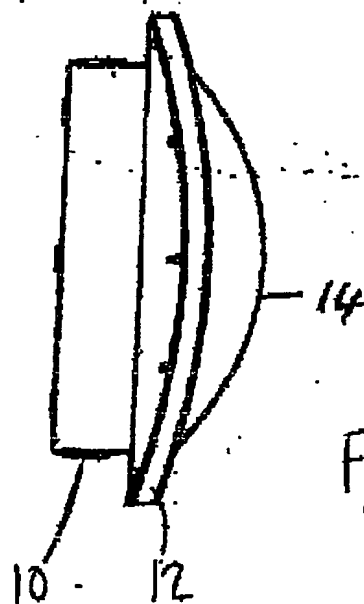


Figure 4

5/5

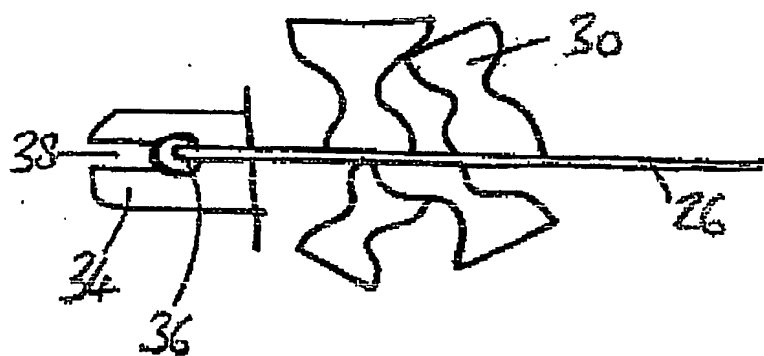


Figure 7

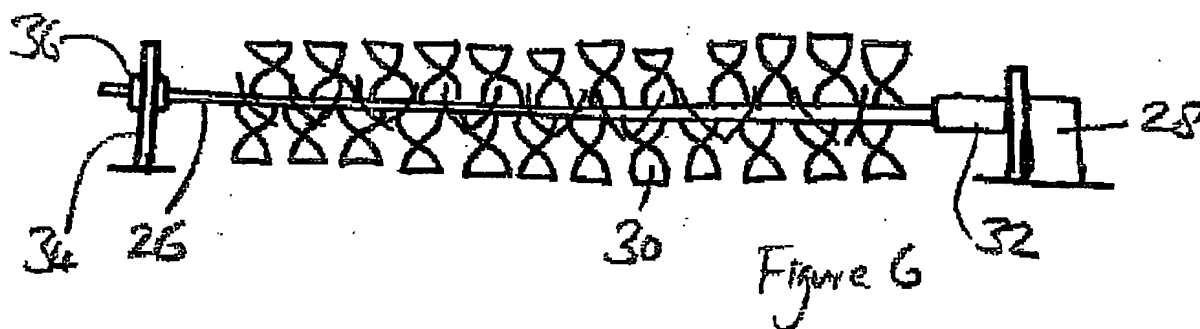


Figure 6

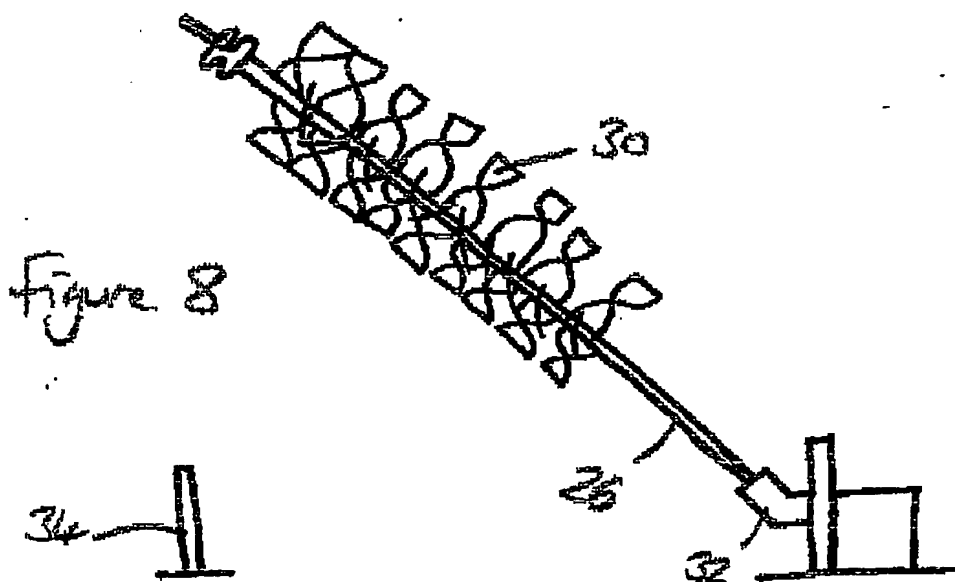


Figure 8

PCT Application

EP0310465



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.